




MCA CRAM, S.L.

Pol. Ind. Matabosch - Avda. del Ter, 186
Ap. Corr. 185 - 08570 TORELLÓ
Telf. 93 859 40 86 - Fax 93 859 40 87
e-mail: info@mcacram.com
www.mcacram.com


CIZALLAS MECÁNICAS
CISAILLE MOTORISEE
GEARED MOTOR OPERATED GUILLOTINES

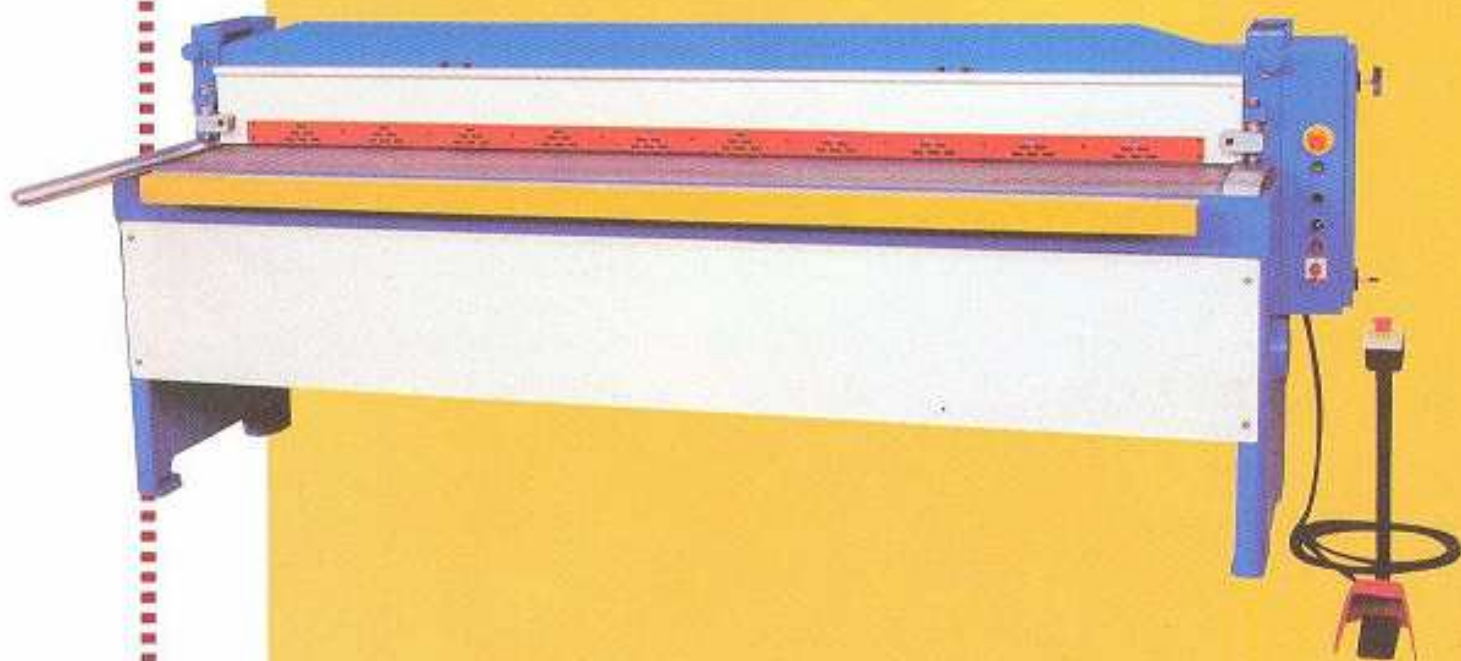

TRGM


TRGM ES UNA EXCLUSIVA DE MCA CRAM, S.L.



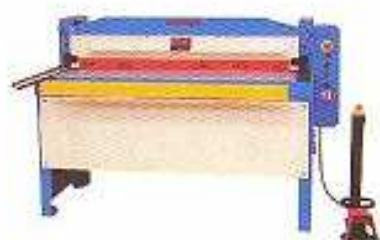

CARACTERISTICAS

- Construcción en acero
- Motor freno
- Soporte chapa extensible
- Paro de emergencia
- Tope trasero manual 500 mm
- Pedal móvil
- Esquadra graduable
- Normas CE

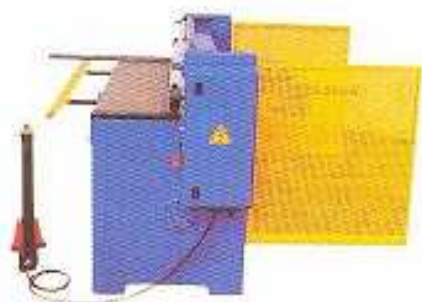

CARACTERISTIQUES

- Construction en acier
- Motor frein
- Support tôle extensible
- Cap de poing d'urgence
- Butée arrière manuel 500 mm.
- Pedale mobile
- Esquerre gradue
- Normes CE



SPECIFICACIONES

- Welded steel construction
- Motorized geared brake motor
- Sliding front sheet support
- Emergency stop
- Back gauge width 500 mm
- Foot pedal
- Graduated table
- CE norms

C. TECNICAS / C. TECHNIQUES / TECHNICAL DATA

MODELO / TYPE / TYP		TRGM 135	TRGM 205	TRGM 305		
Capacidad	Capacite	Cutting capacity	mm	3	3	2
Longitud corte	Longuer coupe	Cutting length	mm	1350	2050	3050
Angulo corte	Angle coupe	Cutting angle		2°30'	2°12'	1°30'
Golpes x min.	Coupes x min.	Stroke min.		35	35	35
Potencia motor	Puissance moteur	Motor power	Kw	3	3	3
Longitud	Longueur	Length	mm	1700	2400	3400
Ancho	Largeur	Width	mm	1350	1350	1350
Altura	Hauteur	Height	mm	1200	1200	1200
Peso	Poids	Weight	Kg	950	1150	1500



MCA CRAM, S.L.

Pol. Ind. Matabosch - Avda. del Ter, 186
 Ap. Corr. 185 - 08570 TORELLÓ
 Telf. 93 859 40 86 - Fax 93 859 40 87
 e-mail: info@mcacram.com
 www.mcacram.com